


2708

Instructions and Applications

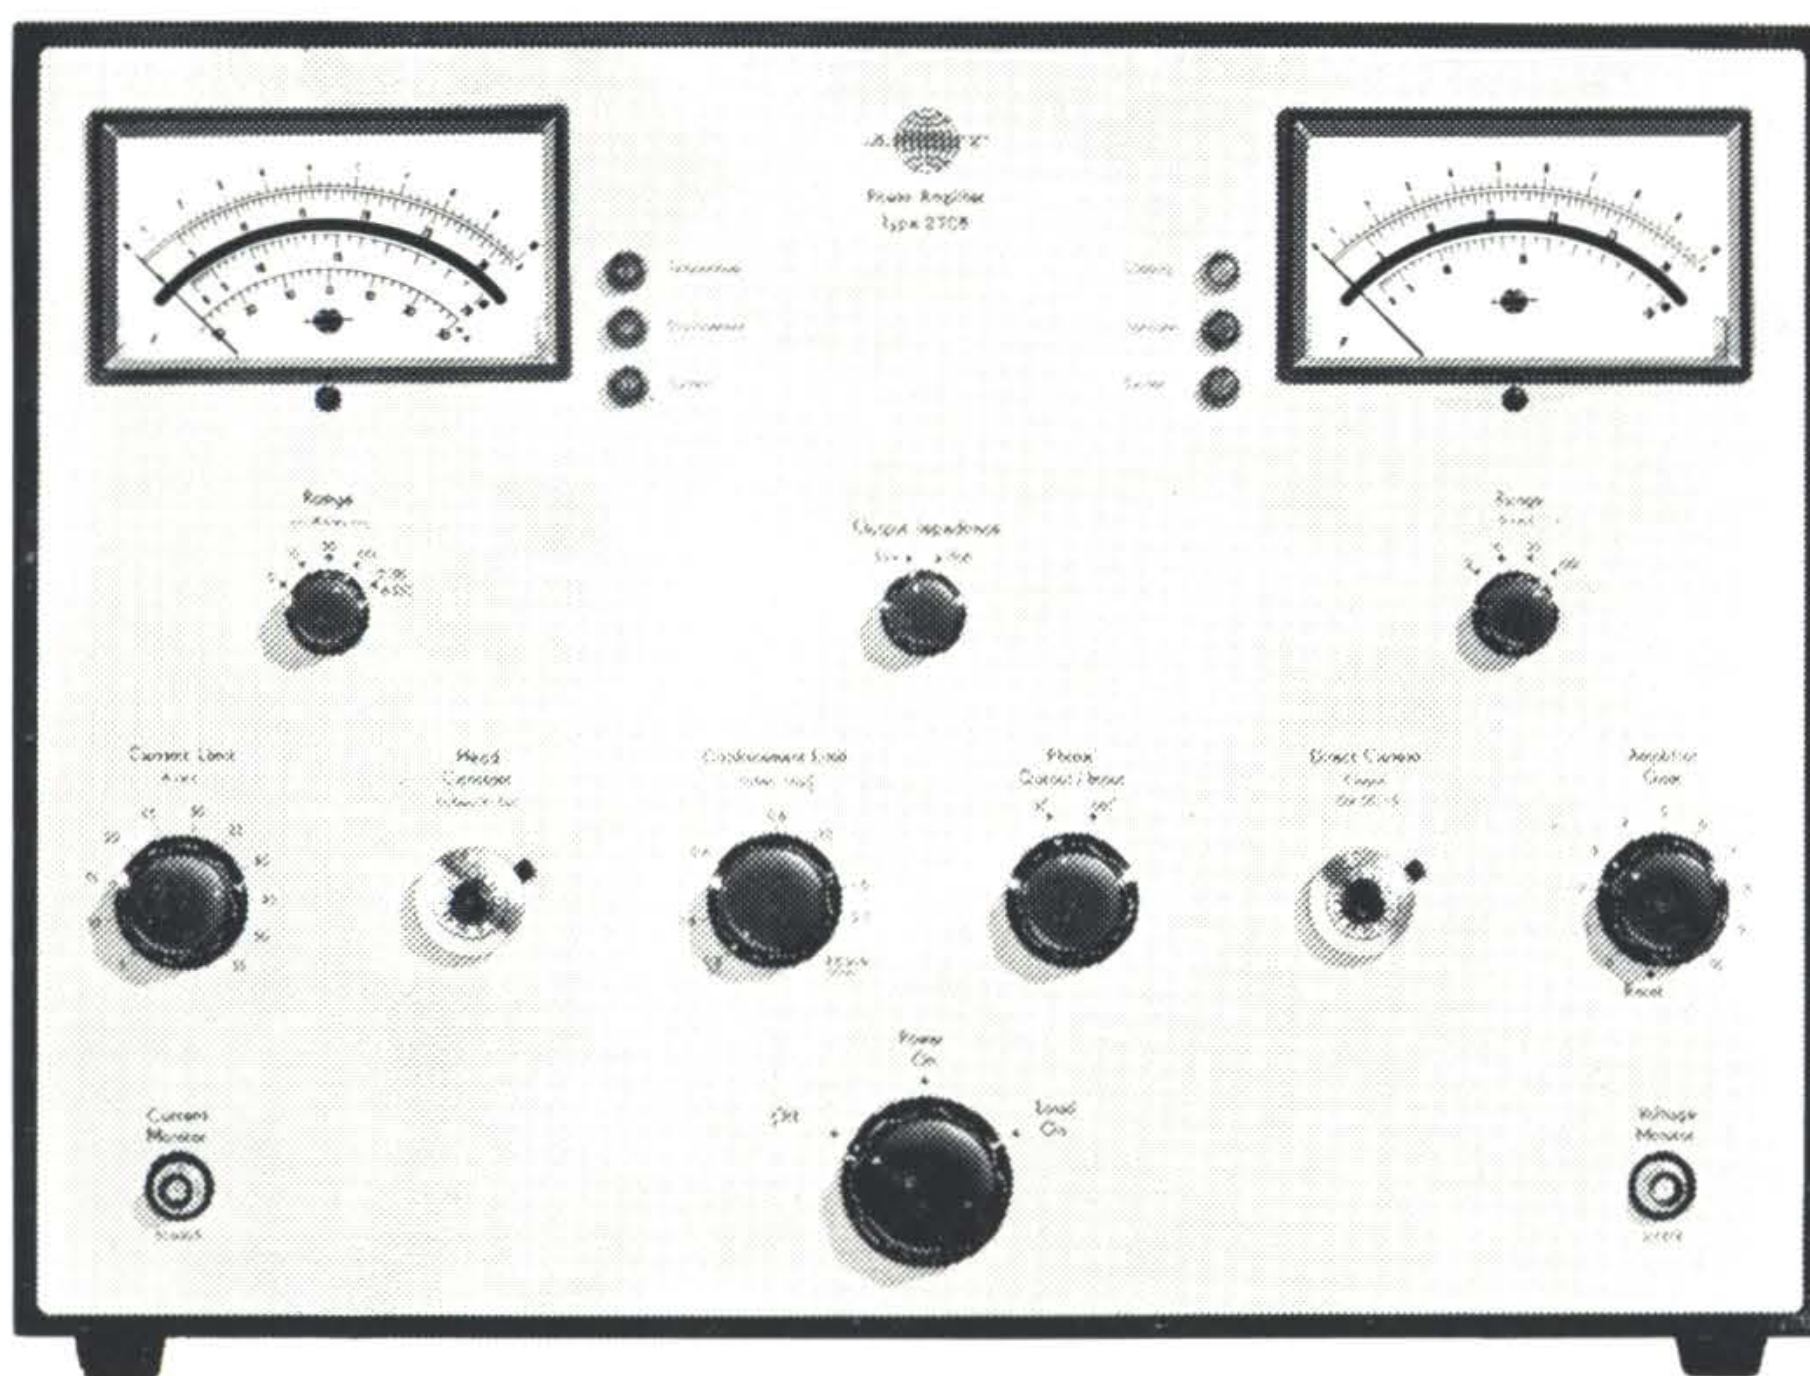

Power Amplifier Type 2708

A 1200 VA, transistorized, low distortion, compact vibration exciter driver, with selectable output impedances, interlocked controls and giving full protection from overtesting and system component failures. Operating range extends down to DC, and a static offset current in the exciter coil can be provided.

BRÜEL & KJÆR