


2708

Instruction Manual

Power Amplifier Type 2708

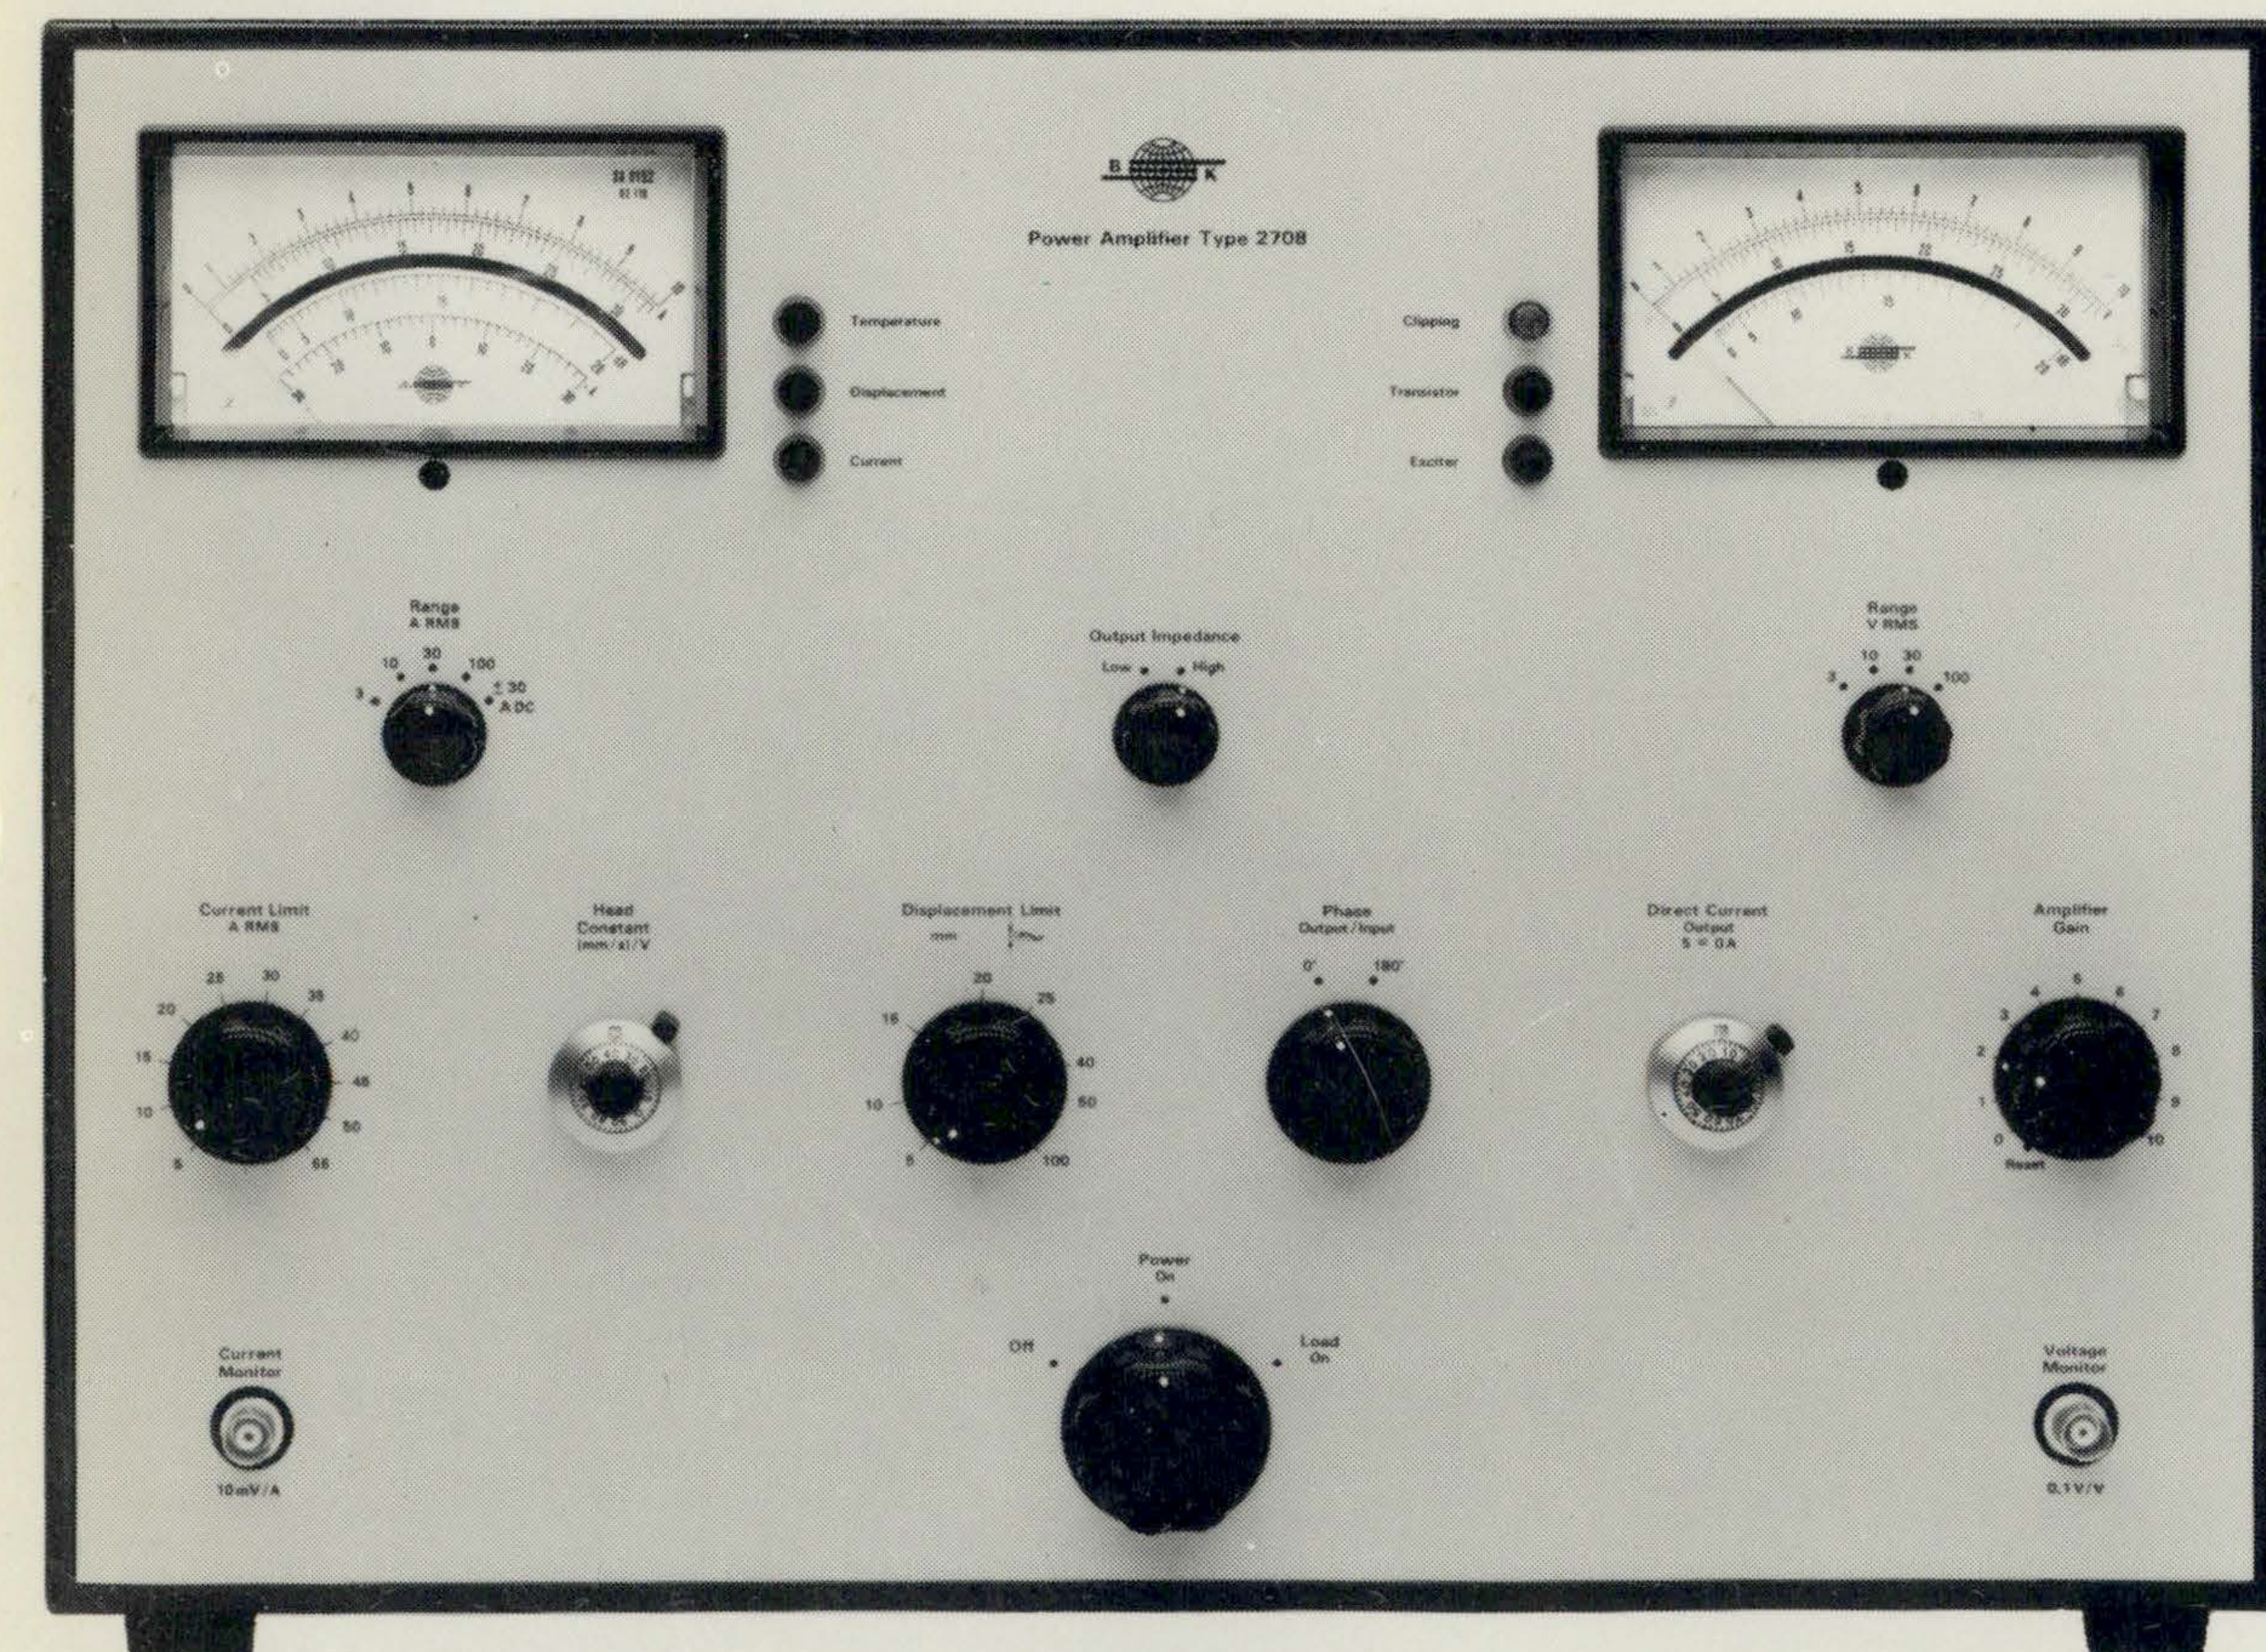

A 1200 VA, transistorized, low distortion, compact vibration-exciter driver, with selectable output impedances, interlocked controls and giving full protection from over-testing and system component failures. Operating range extends down to DC, and a static offset current in the exciter coil can be provided.